


IVECO

TRAKKER

AD/AT 410T44 H Euro III

Rigid 8x4x4

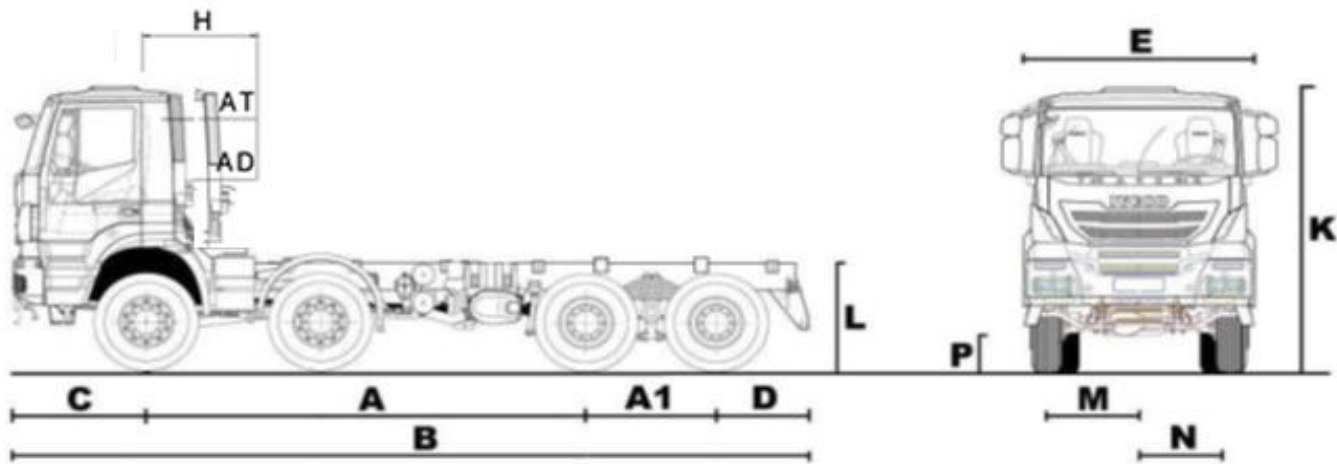

WEIGHTS (kg.)	G.V.W.*	G.C.W.*	First axle	Second axle	Tandem
Design weights (std.)	41.000	44.500	8.000	8.000	26.000
Design weights (opt.)	48.000	70.000	7.500 - 8.500 (*) - 9.000 (**)	7.500 - 8.500 (*) - 9.000 (**)	32.000 (***)
* According to the markets and the homologations					
(*) 8.500 kg. on second axle and 8.500 kg. on first axle only in combination with 26.000 kg. on tandem and option tyres (code 20885)					
(**) 9.000 kg. on first axle and 9.000 kg. on second axle only in combination with 26.000 kg. on tandem and option tyres (code 20885)					
(***) 32.000 kg. on tandem only in combination with 9.000 kg. on first axle, 9.000 kg. on second axle and option tyres (code 20013 - 20022)					

KERBWEIGHTS (kg.) cab / wb.	Short cab*	4.250	5.020	5.820
First and second axles		6.830	6.895	6.935
Tandem		3.730	3.815	3.845
Total		10.560	10.710	10.780
PAYLOAD (kg.) @ G.V.W. 41 t.		30.440	30.290	30.220
* Active Day (AD) version				

DIMENSIONS (mm)		4.250	5.020	5.820
A	Wheelbase	1.380	1.380	1.380
A1	Tandem	1.380	1.380	1.380
B	Overall length (over bumpers)	8.447	9.842	10.022
C	Front overhang	1.440	1.440	1.440
D	Rear overhang	1.225	1.495	1.225
E	Cab width over wings	2.550	2.550	2.550
H	Front axle to front of body	AD 445	445	445
	AT	900	900	900
K	Cab height (unladen)*	3.147	3.147	3.147
L	Frame height at rear frame end	1.087	1.087	1.093
	Frame thickness	10,0	10,0	10,0
	Turning circle (wall to wall)	18.400	20.450	22.450
M	Front track	2.040	2.040	2.040
N	Rear track	1.827	1.827	1.827
P	Ground clearance (front)	337	337	337
	Ground clearance (rear)	310	310	310
* Low roof standard				

TYRES & WHEELS	Tyre code	Mission	Tyre dimensions		Wheel dimensions	
			Front	Rear	Front	Rear
Standard	20079	C	13 R 22,5	13 R 22,5	22,5x9,00	22,5x9,00
Option	20790	C	315/80 R 22,5	315/80 R 22,5	22,5x9,00	22,5x9,00
Option	20188* - 20497*	C - D	12 R 20	12 R 20	20,0x8,50	20,0x8,50
Option	20764	D	12 R 24	12 R 24	24,0x8,50	24,0x8,50
Option	20013 - 20022	C - D	325/95 R 24	325/95 R 24	24,0x8,50	24,0x8,50
Option	20885	D	385/65 R 22,5	315/80 R 22,5	22,5x11,75	22,5x9,00

Tyre mission code: A=long distance; B=regional; C=all use; D=mix/off road

* Only in combination with 7.500 kg. on front axle

NOTE: Weights are to standard specification and include water, oils, tool box, jack and 75 kg. driver. Kerb weights are subject to a manufacturing tolerance of +/- 5%. Long cab adds +110 kg. (95 on front, 15 kg. on rear). Medium Roof on Long Cab adds +230 kg.




AD/AT 410T44 H Euro III

ENGINE		Iveco Cursor 13 (F3BEE681C*B)	
Turbocharger		Variable Geometry Turbine	
Cylinders in line		6	
Bore (mm)		135	
Stroke (mm)		150	
Capacity (litres)		12,88	
Max power (HP/kW)		440/324	
@ rpm		1900	
Max torque (Nm/Kgm)		2100/214	
@ rpm		1000	
Engine brake power		306 Kw @ 2400 rpm	
Cooling system		Water	
Fuel system		Unit pump injector	
Speed limiter		90kmh	

GEARBOXES	MECHANICAL		EUROTRONIC	
	16S 2220 TO		16AS 2630 TO	
Ratios				
1st	13,80		1st	14,12
2nd	11,54		2nd	11,68
3rd	9,49		3rd	9,54
4th	7,93		4th	7,89
5th	6,53		5th	6,52
6th	5,46		6th	5,39
7th	4,57		7th	4,56
8th	3,82		8th	3,78
9th	3,02		9th	3,09
10th	2,53		10th	2,56
11th	2,08		11th	2,09
12th	1,74		12th	1,73
13th	1,43		13th	1,43
14th	1,20		14th	1,18
15th	1,00		15th	1,00
16th	0,84		16th	0,83
Rev 1	12,92		Rev 1	13,07
Rev 2	10,80		Rev 2	10,81

PERFORMANCE					
Type: 16S 2220 TO		(with standard tyres)			
Axle ratios available	4,227	4,67	5,01	5,56	6,096
Geared speed (km/h)	109	99	92	83	76
Gradeability % @ 44 t G.C.W.	60	69	77	92	100
Type: 16AS 2630 TO		(with standard tyres)			
Axle ratios available	4,67	4,227	5,01	5,56	6,096
Geared speed (km/h)	100	111	93	84	77
Gradeability % @ 40 t G.C.W.	71	62	80	96	100

CLUTCH	
Type	Single dry plate, pull type.
Diameter	17 inches/430 mm
BRAKES	
Type	2 independent pneumatic circuits
Service	A.B.S. + E.B.L.
First axle (disc brake opt.)	Disc brakes. 432 mm Friction area: 784 cm2
First axle (drum brake opt.)	Drum brakes. 410 mm
with option tyres (code 20188 - 20497 or 20764)	Friction area: 2884 cm2
Second axle (disc brake opt.)	Disc brakes. 432 mm Friction area: 784 cm2
Second axle (drum brake opt.)	Drum brakes. 410 mm
with option tyres (code 20188 - 20497 or 20764)	Friction area: 2884 cm2
Tandem	Drum brakes. 410 mm Friction area: 3220 cm2
Parking	Mechanical with spring cylinder, rear.
Emergency	Combined with parking brake.
Air reservoirs	6 x 20 litres, steel
Air compressor	352cc – single cylinder
Heated air dryer	Air Processing Unit
Trailer connections	15 pin plug

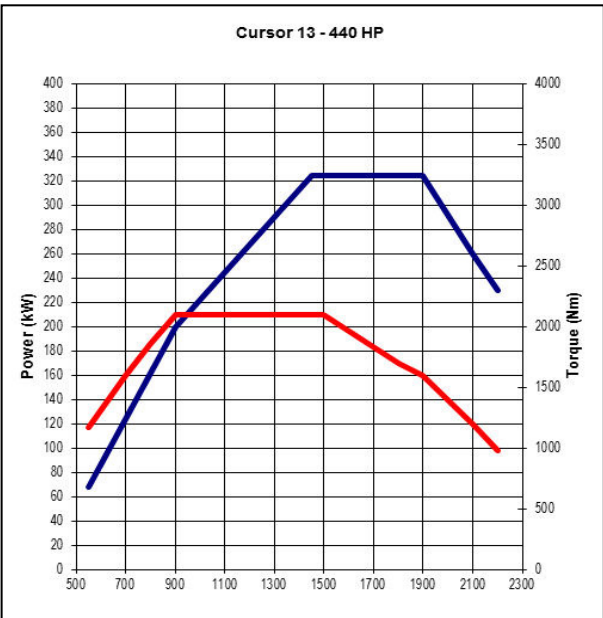

ELECTRICS	
Tension	24v negative earth return
Alternator	28v, 90A
Starter	24v, 5.5kW
Batteries	2 x 12v, 170Ah
Circuits protected	By fuse
System	Multiplex - CAN line data bus
SUSPENSIONS	
Front	Parabolic spring
Rear	Semielliptical suspension
Anti roll bar	Front and rear
Shock absorbers	2 on front
STEERING	
Type ZF 8098	Power assisted
Steering wheel diameter	470 mm
AXLES	
Steering (disc brake opt.)	Iveco 5886/D. Rigid.
Steering (drum brake opt.)	Iveco 5886/2D. Rigid.
Second axle (disc brake opt.)	Iveco 5886/D. Rigid.
Second axle (drum brake opt.)	Iveco 5886/2D. Rigid.
Drive (tandem)	453291/2D. Hub reduction.
FUEL TANK	
Type and capacity	300lt., steel, filter, fuel pump, prefilter.
CAB INTERIOR	
Active Time	
Interior incorporating, air suspended 3-way adjustable driver's seat, inertia reel belt. Passenger seat 2 way adjustable with inertia reel belt. Soft feel dashboard with multi-functional steering wheel incorporating touch button menu controls for the real time digital dash display. Dual scale speedometer. All gauge functions monitored using international symbols. Heater. Left and right hand entry assist handles. Pneumatic adjustable steering column, 2 column mounted control stalks, left stalk operating the indicators, main beam, windscreen wash wipe, (if provided) right stalk operating Eurotronic 2 gear change, engine brake, cruise control and variable speed limiter. If provided, on the left of the steering column there is the dash mounted Eurotronic gearbox controls D - N - R mode (forward and reverse). Overhead console for CB radio. Courtesy and map reading lights. Electronic PTO switch and in cab preparation. Expansio Module. Fabric trim cab interior. Single low level bunk with under bunk storage, bottle holder & storage and control panel.	

Active Day	As above without bunk & under storage, with rear bulk head storage & writing pad.
------------	---

CAB EXTERIOR	
Active Time	
Forward control cab. Galvanised pressed steel construction, with SMC for vulnerable parts. Helical spring suspension and dampers. Hydraulic cab tilt to 60 deg. Tinted electric door windows and tinted laminated screen. Manual rear-view mirrors plus kerb and wideangle mirrors, according to 2003/97/EC. Blind rear cab panel. External stowage for tools. Steel front bumper.	
Active Day	
As above without external stowage.	

CHASSIS	
Ladder construction. Pressed steel side members and riveted and bolted cross members. (C section)	
Wheelbase	Height (mm) x width (mm):
4.250 - 5.820	289x80

NOTE: The information in this literature is intended to be of a general nature only. Iveco reserves the right to modify or change specification at any time.