



WORKING RANGE

-- Max. Capacity LC ** Max. Capacity with mobile hook *** Max. Capacity from horizontal to vertical
The stated performances can be obtained with 20° inclined main boom


50522PX

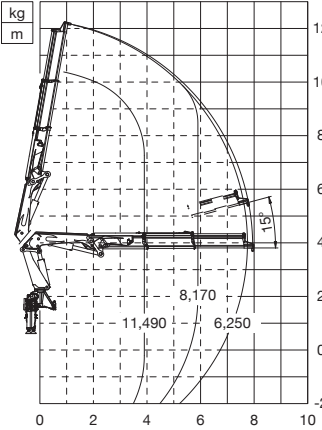


50523PX

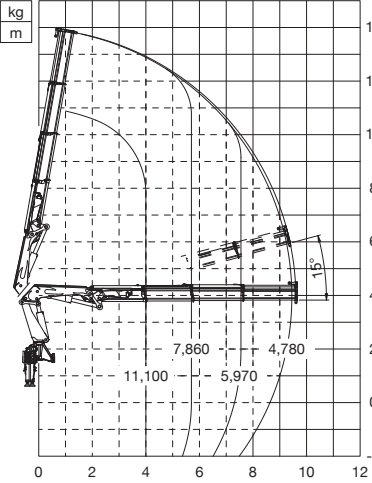


50524PX

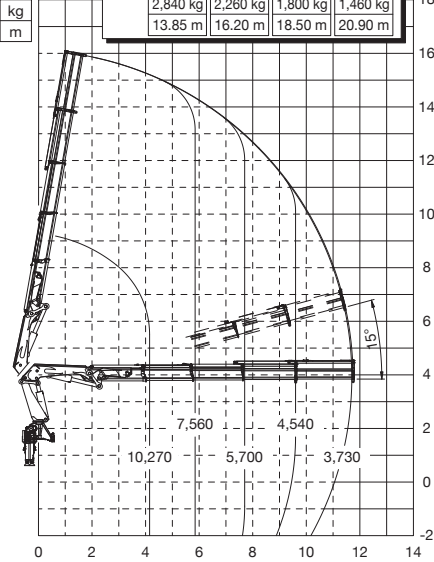

50525PX

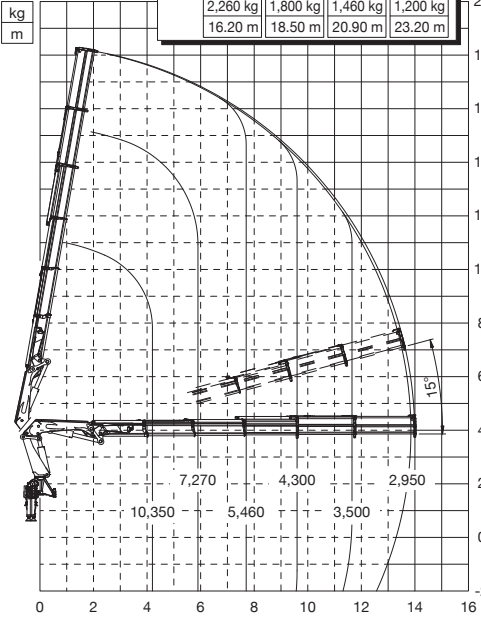

50526PX

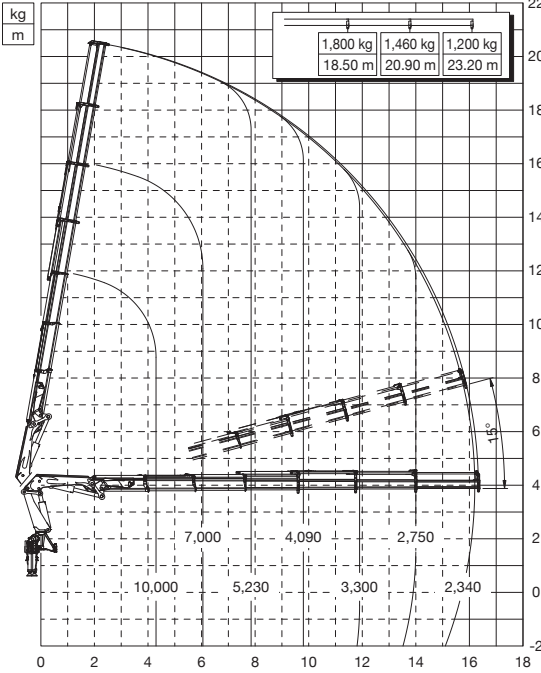

NOTE: Some specifications are subject to change.

PM50.5PX

KNUCKLE BOOM CRANE





PM50.5PX TECHNICAL FEATURES

Up to 6 hydraulic extensions, PM 50.5 PX series ensure high performance, maximum efficiency and high level of reliability. Articulation with the exclusive PM link system, increase the crane efficiency. The crane can operate with same performance and constant outreach, in every vertical configuration of the crane. Maximum stability thanks to XL outriggers (6,6 m) or XXL (8 m). 15° negative angle on secondary boom to work in narrow spaces with maximum flexibility. 395° rotation angle increases the crane productivity and with time saving.

CRANE DATA

				
	tm	l/min	Mpa	ST
50522 PX	48.4	40/80	34,5	395
50523 PX	45.2	40/80	34,5	395
50524 PX	44.5	40/80	34,5	395
50525 PX	43.5	40/80	34,5	395
50526 PX	43	40/80	34,5	395

TRUCK & CRANE COMBINATION

GVW	32.0 t
Outriggers	F & R




Notes: Rear outrigger is required.
Above combination is reference only.
Be sure to perform stability test.




LIFTING CAPACITY & WORK RADIUS


50522 PX




50523 PX




50524 PX



50525 PX



50526 PX





OVERALL DIMENSION

A	50.5PX	C	mm
50522PX	1,330	XL	6,600
50523PX	1,330	XXL	8,000
50524PX	1,330		
50525PX	1,330		
50526PX	1,420		

B	mm	D	mm
50522PX	1,565	Fixed	815
50523PX	1,565	Swing up	970
50524PX	1,565		
50525PX	1,565		
50526PX	1,565		

E	mm
Fixed	1,285
Swing up	1,440

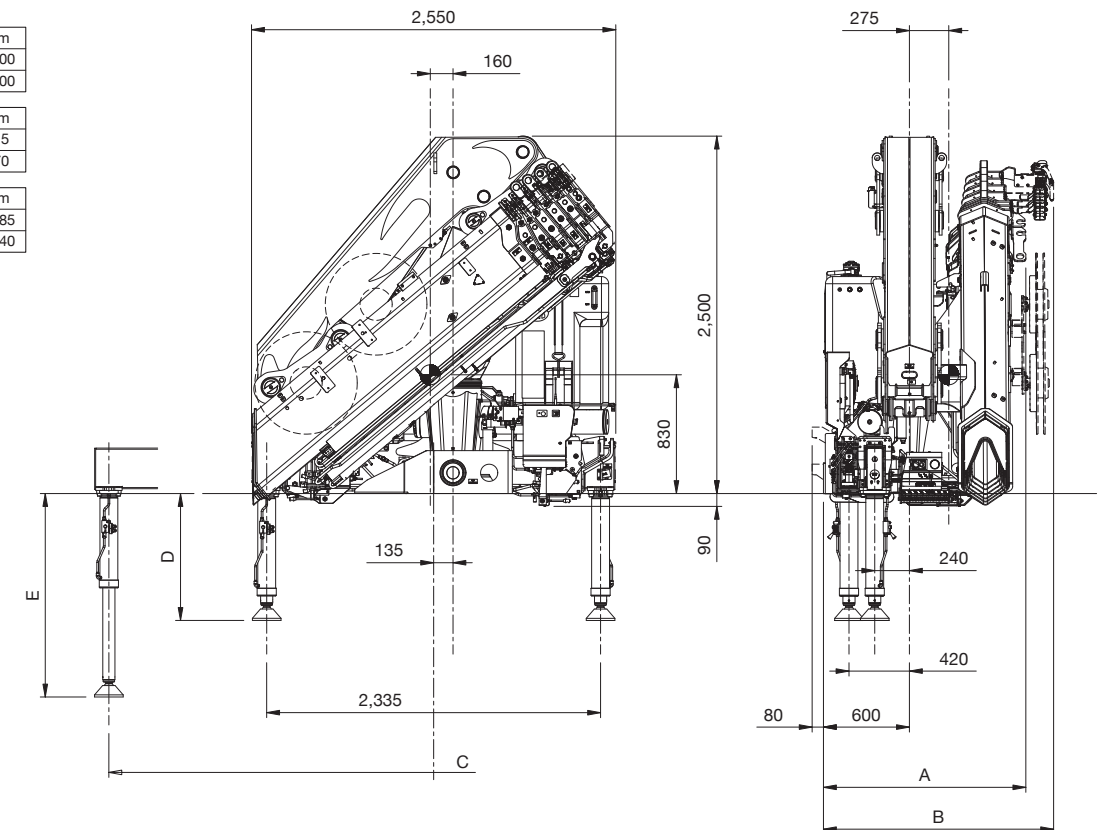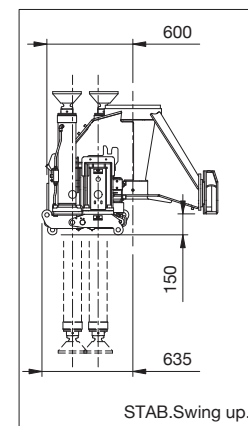

CERTIFICATION



In accordance to the EU
safety standards



3 years of warranty on
the structural parts



Quality Certificate UNI
EN ISO 9001:2008



In accordance to H1-
B3 standard



Certified painting system