

GPMIV 20H25 X-Lift non-CE


Container types:

2-wheel containers

- EN 840-1 120L-400L

4-wheel containers

- EN 840-2 500L-770L
- EN 840-2 1000L- 1200L
- EN 840-3 770L-1300L

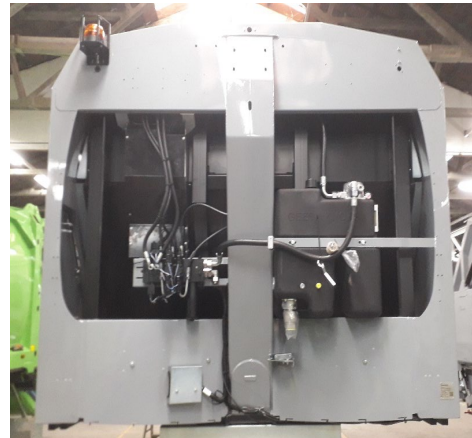

GPMIV X-Lift non-CE specs

Beacon Light LED Front Body Right
Beacon light LED TG LEFT
Bin Rim Locking Extra Cylinder X-lift
Body mounting saddles fixed 8-points
Broom & Shovel Under Body (Supports Included)
Close front body with 2 bars
Comb X-lift
Control Panel Body FRONT X-Force NON CE Unload / TG open TG close_Off Side
Control Panel Body REAR NON CE
Control Panel X-Lift NON CE (full control) Off-side
Control Panel X-Lift NON CE Kerb side
C-profile under body, Body length L=3820
Drip tray under Yoke pivot point
Drive Shaft Lz=750
Fixed Bin catcher GCB
Heating element for two control panels body
Heating Elements for two Control Panels tailgate

Manual Flap xx25 GCB / GEC / GHC
Mounting safety support body - tailgate Left side
Operates in Right-hand Traffic
Protection control panel Non CE
Protection rear lights high - X-lift Conventional
Protection rear lights low - X-lift Conventional
Pump Support Pump position Low (When close couple pump is not possible)
Q8 Oil Handel 32 - Mineral oil
Software option continuous PTO signal
Spillage plate 2500
Standard body floor 4 mm GPM IV / N4 L=3820 W=2540
Variable pump TXV120 R (cw, 120 cc/rev)
Vehicle Lighting Conv TG X-Lift
Water Tap with ball-valve-stop in Tailgate Right
Worklight LED White with protection on rear beam TG LEFT
Worklight LED White with protection on rear beam TG RIGHT
X-lift Bin Frame