

Vehicle description for: TGS 33.400 6x4 BB CH



Illustration can deviate

Vehicle standards

Product family	The new MAN Truck Generation
Model & Variant	TGS 33.400 6x4 BB CH
Vehicle type	Vehicle type, platform truck and chassis (LK)
Cab	TN cab: the flexible one (narrow, long, normal height)
Main wheel distance	4500 mm
Overhang	2500 mm
Steering configuration	Left

Vertical Load

	National Registration	Technical Load
Gross weight	33,000 kg	33,000 kg
Front axle	8,000 kg	8,000 kg
Rear axle	13,000 kg	13,000 kg
Rear axle 2	13,000 kg	13,000 kg

Horizontal Load

	National Registration	Technical Load
Gross train weight	0 kg	0 kg

The printed images in this offer are for explanatory purposes and may differ from the actual configuration.
For further product information on the tire selection "selectively", please contact our sales staff.

Vehicle characteristics

Basic characteristics

<input type="checkbox"/> Chassis	0P2U9
<input type="checkbox"/> Chassis class, heavy	0P2UC
<input type="checkbox"/> Destination Togo (TG)	0PGB2
<input type="checkbox"/> Merchant tonnage 33 t	0P8LK
<input type="checkbox"/> Basic layout of vehicle, all-round rugged	0PGCV
<input type="checkbox"/> Frame type, medium-high	0P2TQ
<input type="checkbox"/> Vehicle type, platform truck and chassis (LK)	0P2UQ
<input type="checkbox"/> Left-hand-drive	0P3AS
<input type="checkbox"/> Right-hand traffic	0P3F5
<input type="checkbox"/> Vehicle documents in English	0P2L7
<input type="checkbox"/> Labelling in English	0P8NM
<input type="checkbox"/> Cab position 640 mm (distance from frame lower edge to cab floor)	0PHBE

Registration

<input type="checkbox"/> Vehicle approval, N3 class	0P3JR
<input type="checkbox"/> Maximum speed limiter, 85 km/h, electronic, engine speed regulation	0P2UI
<input type="checkbox"/> Maximum vehicle noise level not defined	0P2YN
<input type="checkbox"/> Height over cab, unloaded up to 4,000 mm	0PHA1
<input type="checkbox"/> Maximum vehicle width of 2,500 mm checked with respect to relevant cab components	0PIOH
<input type="checkbox"/> Maximum vehicle width of 2,500 mm checked with respect to relevant chassis components	0PIOJ
<input type="checkbox"/> Maximum vehicle width of 2,500 mm checked with respect to relevant axles, rims, tyres, wheel trim	0PIOL
<input type="checkbox"/> Vehicle classification in accordance with regulation (EU) 2018/858	0PKAW

Documents

<input type="checkbox"/> Without registration documentation, national	0P3B0
<input type="checkbox"/> ADR acceptance and TÜV (German technical inspectorate) certificate	0P3CN
<input type="checkbox"/> Dangerous goods equipment, in accordance with ADR type EXIII (EXII,FL,AT)	0P0YT

Application scope / transport tasks

<input type="checkbox"/> Fluids/gases	0P6WD
<input type="checkbox"/> 087 Semitrailer tractor for deployment in agriculture, on-road transport up to field edge	0P2R0
<input type="checkbox"/> Temperature range, vehicle deployment, warm country	0PHIB
<input type="checkbox"/> Case hardness of final drive Distribution	0P4F0

Horizontal and vertical loads

<input type="checkbox"/> 33,000 kg permitted gross load, vertical, nat. appr.	0P5QP
<input type="checkbox"/> 33,000 kg permitted gross load, vertical, tech.	0P5UA
<input type="checkbox"/> 33,000 kg permitted gross load, vertical, tech. Plus	0P8HZ
<input type="checkbox"/> 8,000 kg permitted load on front axle, nat. appr.	0P5KT
<input type="checkbox"/> 8,000 kg permitted load on front axle, tech.	0P5LN
<input type="checkbox"/> 8,000 kg permitted load on front axle, tech. Plus	0P8D4
<input type="checkbox"/> 13,000 kg permitted load on rear axle NatZu	0P5HC
<input type="checkbox"/> 13,000 kg permitted load on rear axle, tech.	0P5IO
<input type="checkbox"/> 13,000 kg permitted load on rear axle, tech. Plus	0P8BY

<input type="checkbox"/> 13,000 kg permitted load on 2nd rear axle NatZu	0P5FM
<input type="checkbox"/> 13,000 kg permitted load on 2nd rear axle, tech.	0P5M9
<input type="checkbox"/> 13,000 kg permitted load on 2nd rear axle, tech. Plus	0P7TJ
<input type="checkbox"/> 0kN D value	0P8XD

Notification texts

<input type="checkbox"/> Note: Difference of more than 2% in FA/RA rolling circumference may lead to perceptible tension in the driveline.	0PHCX
--	-------

Chassis

Vehicle frame (wheelbase, overhang, ...)

<input type="checkbox"/> Main wheelbase, 4,500 mm	0P2ZW
<input type="checkbox"/> Wheelbase between rear axles, 1,400 mm	0P3BX
<input type="checkbox"/> Frame overhang, rear, 2,500 mm	0P3E1
<input type="checkbox"/> Main frame side member thickness, 9.5 mm	0P0Y7
<input type="checkbox"/> Vehicle rear, straight end of frame	0P0XT

Exhaust system, air intake

<input type="checkbox"/> Exhaust silencer, side, left	0P1BG
<input type="checkbox"/> Exhaust tailpipe, towards rear	0P1BQ
<input type="checkbox"/> Air intake, behind cab, raised	0P0AY

Battery cases, batteries, alternator

<input type="checkbox"/> Battery, 12 V, 175 Ah, 2 units, maintenance free	0P0WA
<input type="checkbox"/> Alternator, Basic	0P1BV
<input type="checkbox"/> Medium battery box, 2 batteries	0P0WU
<input type="checkbox"/> Battery box, left	0P0WO
<input type="checkbox"/> Battery emergency stop switch	0P3JV
<input type="checkbox"/> Fuses	0P1V1

Tanks and fuel line

<input type="checkbox"/> Fuel tank capacity 300 l, right	0P4E8
<input type="checkbox"/> Fuel tank, right, steel	0P4GN
<input type="checkbox"/> Tank cross-section, right, low	0P4HF
<input type="checkbox"/> Fuel tank cap, lockable for master key system	0P4H5

Frame attachments

<input type="checkbox"/> Without underride protection, front	0P1FM
<input type="checkbox"/> Without working platform	0P0VH
<input type="checkbox"/> Fire skirt, vehicle for transporting hazardous goods	0P0YB
<input type="checkbox"/> Without underride protection, side	0P1FG
<input type="checkbox"/> Spare wheel hoist on left side, in front of rear axle	0P0XO
<input type="checkbox"/> Hoist for spare wheel	0P0VN
<input type="checkbox"/> Final cross member, with hole pattern 160 x 100 mm	0P1SB
<input type="checkbox"/> Underride protection, rear, round	0P1FD
<input type="checkbox"/> Wheel chock, 1 unit, with retaining device	0P1FO
<input type="checkbox"/> Without body attachment brackets/thrust plates	0P0X6

Pneumatic brakes, compressed-air generation, brake system

<input type="checkbox"/> Air compressor, 1-cylinder, 360 ccm	0P0AF
<input type="checkbox"/> Compressed-air treatment, pneumatically controlled	0P0AB
<input type="checkbox"/> Steel compressed-air tank	0P0XH
<input type="checkbox"/> Electronic brake system (EBS)	0P0BL
<input type="checkbox"/> Anti-lock braking system (ABS)	0P0BE
<input type="checkbox"/> Full brake assistant	0P0CM
<input type="checkbox"/> Without preparation for EBS Full control unit	0PHPM
<input type="checkbox"/> MAN EVB high-performance engine brake	0P0BV
<input type="checkbox"/> Drum brakes on front axle	0P1IA
<input type="checkbox"/> Drum brakes on rear axle	0P1I5
<input type="checkbox"/> Drum brakes on 2nd rear axle	0P1IF
<input type="checkbox"/> Parking brake control, next to driver's seat	0P3KH
<input type="checkbox"/> Parking brake with spring-type actuator on rear axles (incl. leading axle/ trailing axle)	0PGBL
<input type="checkbox"/> MAN EasyStart immobiliser	0P1TF

Lights and acoustic signals on the chassis (rear lights, ...)

<input type="checkbox"/> Rear lights	0P2AQ
<input type="checkbox"/> Acoust. Reversing warning system when reverse gear selected	0P3CD
<input type="checkbox"/> Light function test	0P2AD
<input type="checkbox"/> No side marker lights	0P2BK

Driveline/running gear

Engine, radiator

<input type="checkbox"/> Diesel engine MAN D2066 LF06, 294 kW (400 hp) output, 1,900 Nm torque, Euro 2	0P6BR
<input type="checkbox"/> Fuel filter, for fuels up to Cleanliness Class 25	0PHII
<input type="checkbox"/> Fuel pre-filter, with oil separator/water trap	0P0AT
<input type="checkbox"/> Without torque reduction	0P0G5
<input type="checkbox"/> Ventilation, crankcase, open	0P8PN
<input type="checkbox"/> Engine skirt, in wheel arch, to prevent engine soiling	0P2E9
<input type="checkbox"/> Fan control for start of cooling with low coolant temperature (e.g. hot country)	0P0K5
<input type="checkbox"/> Reduction of dust swirl through radiator fan	0P1YE
<input type="checkbox"/> Engine cooler, normal length	0P4XX
<input type="checkbox"/> Radiator protection, lower	0P1XE
<input type="checkbox"/> Front radiator protection, grille	0P1VP
<input type="checkbox"/> Engine oil dipstick	0P0B5
<input type="checkbox"/> Warning message for engine coolant level, with advance warning	0P0KA
<input type="checkbox"/> Antifreeze, down to -32 °C	0P0AK

Gearbox, clutch

<input type="checkbox"/> MAN TipMatic 12.28 OD	0P5VW
<input type="checkbox"/> Gearbox for increased percentage of overrun during driving operation	0PGCL
<input type="checkbox"/> MAN TipMatic actuation, with drop arm, manual (DNR option, switching strategy option)	0P3KI
<input type="checkbox"/> MAN Idle Speed Driving gearbox function	0P0ER
<input type="checkbox"/> MAN TipMatic Efficiency driving program, up to 70,000 kg	0P0FA
<input type="checkbox"/> MAN TipMatic Offroad gearbox shift strategy, up to 70,000 kg	0P0F4

- Single-disc clutch, 430 mm, dry, reinforced (LongLife) 0P0DW
- Driveline propshaft, reinforced 0P0E2
- Propshaft, 2nd rear axle, reinforced 0PGCF

Wheels, tyres

- Required tyre speed index G 0PFWA
- Tyres for front axle, Bridgestone 13R22.5 M-STEER 001 Steering-Road+Offroad TL 0PGKZ



-

Product Information Sheet


Delegated Regulation (EU) 2020/740

Supplier name or trademark	BRIDGESTONE
Commercial name or trade designation	M-STEER 001
Tyre type identifier	8695
Tyre size designation	13 R22.5
Load-capacity index	156
Load-capacity index (Load index for Dual mounting)	150
Speed category symbol	K
Fuel efficiency class	C
Wet grip class	B
External rolling noise class	A
External rolling noise value	70 dB
Severe snow tyre	Yes
Date of start of production	02/17
Date of end of production	-
Additional information	
Load-capacity index (Single load index for Additional Service Description)	
Load-capacity index (Dual load index for Additional Service Description)	
Speed category symbol (for Additional Service Description)	

- Rim type, front axle, steel, single-part 0P0P0
- Rim size, front axle, 10-hole, 9.00x22.5 0P0NI
- Wheel nut cover ring, front axle 0P0PR

Tyres for rear axle, Bridgestone 13R22.5 M-DRIVE 001 Drive-Road+Offroad TL

0PGF2

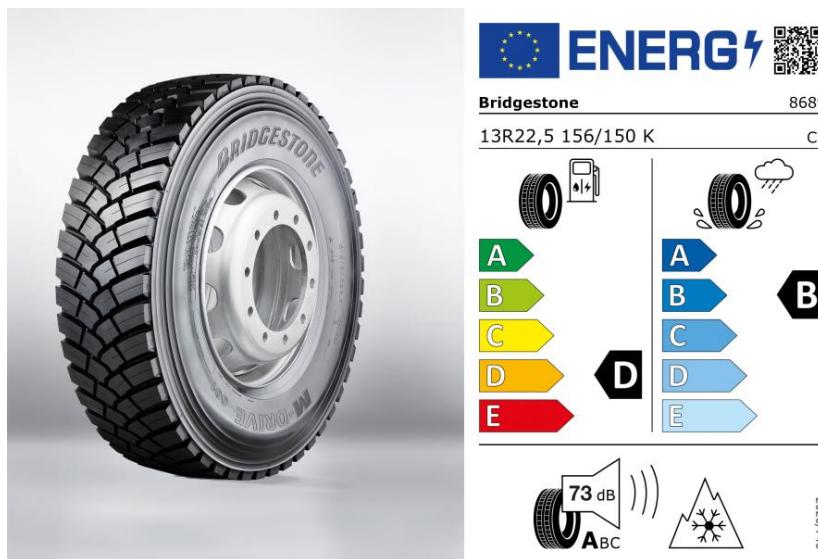

Product Information Sheet

Delegated Regulation (EU) 2020/740

Supplier name or trademark	BRIDGESTONE
Commercial name or trade designation	M-DRIVE 001
Tyre type identifier	8689
Tyre size designation	13 R22.5
Load-capacity index	156
Load-capacity index (Load index for Dual mounting)	150
Speed category symbol	K
Fuel efficiency class	D
Wet grip class	B
External rolling noise class	A
External rolling noise value	73 dB
Severe snow tyre	Yes
Date of start of production	06/16
Date of end of production	-
Additional information	
Load-capacity index (Single load index for Additional Service Description)	
Load-capacity index (Dual load index for Additional Service Description)	
Speed category symbol (for Additional Service Description)	

Rim type, rear axle, steel, single-part

Rim size, rear axle, 10-hole, 9.00x22.5

0P0OO

0P0MU

Tyres for 2nd rear axle, Bridgestone 13R22.5 M-DRIVE 001 Drive-Road+Offroad TL

0PGHG



Product Information Sheet

Delegated Regulation (EU) 2020/740

Supplier name or trademark	BRIDGESTONE
Commercial name or trade designation	M-DRIVE 001
Tyre type identifier	8689
Tyre size designation	13 R22.5
Load capacity index	156
Load capacity index (Load index for Dual mounting)	150
Speed category symbol	K
Fuel efficiency class	D
Wet grip class	B
External rolling noise class	A
External rolling noise value	73 dB
Severe snow tyre	Yes
Date of start of production	06/16
Date of end of production	-
Additional information	
Load capacity index (Single load index for Additional Service Description)	
Load capacity index (Dual load index for Additional Service Description)	
Speed category symbol (for Additional Service Description)	

Rim type, 2nd rear axle, steel, single-part
 Rim size, 2nd rear axle, 10-hole, 9.00x22.5
 Spare wheel, in accordance with configuration for front axle tyres

0P0PA

0P0O7

0P0MH

Axles

<input type="checkbox"/> 6x4	0P3B9
<input type="checkbox"/> Steering ratio, indirect	0P1JY
<input type="checkbox"/> Steering oil tank with electrical measuring sensor	0P1JV
<input type="checkbox"/> Front axle, 9,200 kg, not driven, straight, steered, not liftable	0P5EX
<input type="checkbox"/> Mudguard, front axle	0P1AT
<input type="checkbox"/> Rear axle, 13,000 kg, planetary axle with drive shaft, straight, not steered, not liftable	0P4ZM
<input type="checkbox"/> Twin tyre on rear axle	0P1HN
<input type="checkbox"/> Mudguard, rear axle, upper shell removable	0P1AM
<input type="checkbox"/> Splash guard mat on mudguard, rear axle, longer at bottom	0P1XK
<input type="checkbox"/> 2nd rear axle, 13,000 kg, planetary axle without drive shaft, straight, not steered, not liftable	0P4Y7

<input type="checkbox"/> Twin tyre on 2nd rear axle	0P1HW
<input type="checkbox"/> Mudguard, 2nd rear axle, removable upper shell	0P1B3
<input type="checkbox"/> Splash guard mat on mudguard, 2nd rear axle, longer at bottom	0P1Y0
<input type="checkbox"/> Axle ratio, $i = 4.00$	0P0D2
<input type="checkbox"/> Differential locks on driven rear axles	0P0DI
<input type="checkbox"/> Without differential locks, front axles	0P0DL

Axle control system and suspension

<input type="checkbox"/> Suspension type for front axles and driven rear axles, leaf/leaf (BB)	0P2YB
<input type="checkbox"/> Leaf-spring suspension on front axle, parabolic, 3-leaf, steel	0P1JE
<input type="checkbox"/> Leaf-spring suspension on rear axle, parabolic, 5-leaf, steel	0P1J2
<input type="checkbox"/> Leaf-spring suspension on 2nd rear axle, parabolic, 5-leaf, steel	0P1JL
<input type="checkbox"/> Spring load-bearing capacity front axle 9,500 kg	0P5C4
<input type="checkbox"/> Spring load-bearing capacity of rear axle, 13,000 kg	0P5BV
<input type="checkbox"/> Spring load-bearing capacity of 2nd rear axle, 13,000 kg	0P5C7
<input type="checkbox"/> Shock absorbers on front axle	0P1M4
<input type="checkbox"/> Shock absorbers on rear axle	0P1LQ
<input type="checkbox"/> Shock absorbers on 2nd rear axle	0P1M9
<input type="checkbox"/> Stabiliser, front axle	0P1LD
<input type="checkbox"/> Stabiliser, rear axle	0P1LA
<input type="checkbox"/> Stabiliser, 2nd rear axle	0P1LH
<input type="checkbox"/> Wishbone	0P6ZR

Cab

Cab and cab exterior

<input type="checkbox"/> TN cab: the flexible one (narrow, long, normal height)	0P2DF
<input type="checkbox"/> Cab mount, Basic	0P1V8
<input type="checkbox"/> Cab tilt mechanism, manual	0P1V6
<input type="checkbox"/> Tilting roof, mechanical	0P1VW
<input type="checkbox"/> Bumper, steel, 3 pieces	0P1SG
<input type="checkbox"/> Front step, integrated, with grab option	0P1VE
<input type="checkbox"/> Windscreen, composite safety glass, tinted	0P1X0
<input type="checkbox"/> Sunblind, in front of windscreen	0P1WK
<input type="checkbox"/> Wiper system for windscreen	0P1WG
<input type="checkbox"/> Wiper activation, manual	0P1UL

- Step unit, hinged

0P1V0



- Central locking, no remote control 0P1WS
- Vehicle key, 2 units 0P3JT
- No door extension 0P1WV
- Door labelling, according to maximum technically permitted overall vehicle weight 0P2DO
- Door windows, tinted 0P1WO
- Door window, safety glass 0P1WM
- Cab rear wall, no window 0P1VD

Lights and acoustic signals on cab exterior (headlights, horn, ...)

- Front headlights, H7 0P1ZN
- Stone protection guard for front headlights, wide and fine mesh 0PICD
- Daytime driving lights, H7 0P2BN
- Fog lights, H7 0P2AH
- Headlight beam regulator, manual 0P2AC
- Driving-light control, manual 0P1ZF
- Contour lights, LED, 2 units 0P2BS
- Turn signal lights, sides, bulb 0P1Z6
- Horn, two-tone, electrical 0P1W1
- Revolving beacons, LED, yellow (individual LEDs light up in cascades, revolving) 0P2BD
- 2 revolving beacons on cab roof, 1 right and 1 left 0P2B3
- Spotlights, 2 units, cab roof, 1 right and 1 left 0P1YM
- Spotlight, halogen, white 0P1YY
- Switch for spotlight/manoeuvring light 0P5U5
- Without revolving beacons at the rear of the vehicle 0PJRO

Mirrors and mirror replacements

- Exterior rear-view mirror, electrically adjustable 0P2CA
- Mirror housing, not painted 0P2CP
- Vehicle components, suitable for body width larger than 2,400 mm to 2,600 mm 0P2CT
- Kerb mirror, right, electrically adjustable 0P2CG
- Front mirror, mechanical adjustment 0P2CJ

Seats

<input type="checkbox"/> Seat covers, fabric, standard	0P2PQ
<input type="checkbox"/> Comfort driver's seat, air-sprung	0P2P2
<input type="checkbox"/> Co-driver's seat, not sprung, with storage box	0P2OO
<input type="checkbox"/> Storage space, in seat bracket of co-driver's seat	0P2Q6

Driver's workplace

<input type="checkbox"/> Multi-function steering wheel, adjustable height and angle	0P2GD
<input type="checkbox"/> Steering wheel, with parking position	0P2GE
<input type="checkbox"/> Steering lock	0P3JZ
<input type="checkbox"/> Instrumentation, Basic km/h	0P3L3
<input type="checkbox"/> Analogue tachograph, for vehicles for transporting hazardous goods (ADR), CONTINENTAL	0P2KT
<input type="checkbox"/> Tachograph, calibrated	0P2KG
<input type="checkbox"/> Stowage compartment, open with two USB sockets, 5 V, charging only, to the right of climate control panel	0PGT7
<input type="checkbox"/> 2 pull-out cup holders in instrument panel	0P2FA
<input type="checkbox"/> Plug-in ashtray, instrument panel in middle section, 1 unit	0P2FO
<input type="checkbox"/> Cigarette lighter	0P2IH
<input type="checkbox"/> Single DIN slots, 4 units, roof space, front	0P2FJ

Cab air-conditioning system

<input type="checkbox"/> Air-conditioning system, manual	0P2NU
--	-------

Bunk area

<input type="checkbox"/> Bunk, bottom, with slatted support	0P2GX
<input type="checkbox"/> Comfort bed mattress, bottom, 110 mm	0P2GK
<input type="checkbox"/> Net, left, at bottom bunk	0P2EI
<input type="checkbox"/> Net, right, at bottom bunk	0P2EO
<input type="checkbox"/> Storage box, rear, left, accessible from outside with flap and from inside with suspended tray	0P2H1
<input type="checkbox"/> Storage box, rear, right, accessible from outside with flap and from inside with suspended tray	0P2H5

Cab interior

<input type="checkbox"/> Colour scheme for interior styling, dark	0P2I6
<input type="checkbox"/> Interior styling analogous to colour scheme	0PGBT
<input type="checkbox"/> Windscreen roller blind, internal	0P2FE
<input type="checkbox"/> Interior light, central	0PHA6
<input type="checkbox"/> Entry lighting	0P2IO
<input type="checkbox"/> Door interior cladding, washable	0P2IA
<input type="checkbox"/> Storage, instrument panel in middle section, open	0P2HK
<input type="checkbox"/> Storage compartment, below the bunk, with bulkhead	0P2HH
<input type="checkbox"/> Net, cab rear wall	0P2F0
<input type="checkbox"/> Grab handle, above door, internal, 2 units, 1 right and 1 left	0P2G2
<input type="checkbox"/> Entry handles, standard	0PHPK

Accessories and tools

<input type="checkbox"/> Jack, 12,000 kg	0P3F8
<input type="checkbox"/> Vehicle toolkit	0P2TX

No warning triangle 0P3FH

Intelligent Truck

Assistance systems

<input type="checkbox"/> Tempomat (cruise control, CC)	0P1TR
<input type="checkbox"/> Road speed limiter, adjustable, limiter (engine speed regulation)	0P0C3
<input type="checkbox"/> Without advanced emergency braking system	0P1U5

Infotainment (radio,...)

<input type="checkbox"/> MMT infotainment system, Starter Basic	0P2M1
<input type="checkbox"/> MAN loudspeaker system	0P2MF
<input type="checkbox"/> No navigation map	0P2N2
<input type="checkbox"/> French additionally for display	0P2JT

Bodies/interfaces

Interfaces to semitrailer (e.g. fifth-wheel coupling, brake connection,...)

<input type="checkbox"/> Without trailer brake connection behind cab	0P1O3
<input type="checkbox"/> No fifth-wheel coupling	0P1RJ

Interfaces to trailer (e.g. trailer coupling, brake connections,...)

<input type="checkbox"/> Towing coupling at final cross member, ROCKINGER SK5	0P1MZ
<input type="checkbox"/> Towing coupling on final cross member	0P1SH
<input type="checkbox"/> Without trailer brake connection at end of frame, centre	0P1O0
<input type="checkbox"/> Without trailer socket at frame end	0P1OW
<input type="checkbox"/> Without trailer socket for anti-lock brake system (ABS)	0P1O9

Ex works bodies and interfaces to bodies (e.g. tipper indicator...)

<input type="checkbox"/> Interface for body power supply, rear front panel	0P1DD
<input type="checkbox"/> Interface for data exch. with body (customer-specific control module) and engine intermediate speed control (ZDR), front area of cab	0P2NA

PTOs

<input type="checkbox"/> PTO, gearbox-dependent, type NH/1c, without flange, f=1.26, position approx. 2:30 o'clock	0P4QU
<input type="checkbox"/> PTO, gearbox-dependent, continuous operation	0P4VJ
<input type="checkbox"/> PTO, gearbox-dependent, shiftable	0P4X9
<input type="checkbox"/> Without fan wheel for PTO, gearbox-dependent	0P4VR
<input type="checkbox"/> Function parameters for PTO; gearbox-dependent, driving operation	0P4WP
<input type="checkbox"/> Sector-specific parameterisation, general	0P4X0

Towing, recovery and lashing

<input type="checkbox"/> Central coupling jaw, integrated in bumper/front cross member, with lock pin	0P1MK
---	-------

Paintworks

Paintwork, cab, top

<input type="checkbox"/> Top coating, cab	0P6YB
---	-------

Paintwork, cab, bottom

<input type="checkbox"/> Top coating, step units	0P6X7
<input type="checkbox"/> Top coating, mudguard, behind cab	0P6YF
<input type="checkbox"/> Top coating, bumper, steel	0P6YO

Paintwork, chassis

<input type="checkbox"/> Top coating, chassis	0P6YC
<input type="checkbox"/> Top coating, rims, steel, white-aluminium	0P6YL

Additional operating equipment

<input type="checkbox"/> Eintrag in KFZ-Brief: Anhängelast 40.000kg bei Zgg. 59.000kg	ZW001
---	-------

Colour

<input type="checkbox"/> Top coating, chassis	GRAPHITE BLACK RAL 9011	W
<input type="checkbox"/> Top coating, cab	PURE WHITE RAL 9010	N
<input type="checkbox"/> Top coating, bumper, steel	PURE WHITE RAL 9010	A
<input type="checkbox"/> Top coating, step units	PURE WHITE RAL 9010	A
<input type="checkbox"/> Top coating, mudguard, behind cab	PURE WHITE RAL 9010	A

Technical data: TGS 33.400 6x4 BB CH / L26EAA08

Vehicle type: Vehicle type, platform truck and chassis (LK)

Cab: TN cab: the flexible one (narrow, long, normal height)

Drive Type: 6x4

Lengths		mm
TD071	Total length	9875.0
TD063	Front vehicle overhang	1475.0
TD057	Wheelbase between front axles	0
TD058	Wheelbase between leading axle and rear axle	0
TD059	Wheelbase between rear axles	1400
TD060	Wheelbase between rear axle and trailing axle	0
TD064	Rear frame overhang	2500.0
TD072	Distance from first front axle to body	465.0
TD067	Distance to kingpin from front axle, nominal position	-
TD074	Slew radius, front	-
TD075	Slew radius, rear	-
TD068	Coupling length	9795.0
Widths		mm
TD008	Width included rearview mirror	2981.0
TD001	Width over cab	2240.0
Frame		mm
TD009	Frame width at front	940.0
TD010	Frame width at the rear	760.0
TD078	Frame profile	270 x 85 x 9,5
Heights		mm
TD033	Maximum external height, unladen	3330.0
TD082	Total transport height, unladen	3330.0
TD034	Maximum external height, laden	3232.0
TD035	Frame height at theoretical rear wheelbase, unladen	1160.0
TD036	Frame height at theoretical rear wheelbase, laden	1080.0
TD045	Raising from driving position, front	0.0
TD046	Lowering from driving position, front	0.0
TD047	Raising from driving position, rear	0.0
TD048	Lowering from driving position, rear	0.0
TD051	Height of fifth-wheel coupling above ground, unladen	-
TD052	Height of fifth-wheel coupling above ground, laden	-
Circle dimensions		m
TD055	Track circle diameter	19.6
TD056	Wall-to-wall turning circle diameter	21.4
Weights/loads		kg
TD026	Chassis weight with cab	Error: 204
TD027	Chassis weight, front	4812
TD028	Chassis weight, rear	4485

TD029	Payload	23703
TD018	Statutorily permissible gross vehicle weight	33000
TD025	Technically permissible gross vehicle weight	33000
TD031	Statutorily permissible gross train weight	0
TD032	Statutorily permissible trailer load	0

The technical data must be considered as an approximation. Some of the values are given in a simplified form. More detailed notes and descriptions can be found in the respective information in the overview. Contents and specifications have been compiled with the greatest possible care. Nevertheless, we do not assume responsibility for the data and values supplied being correct and up to date. Subject to errors and changes. MAN Truck & Bus AG is liable only in cases of intent, gross negligence or culpable breach of significant contractual obligations.