

GPMIV 20H25 X-Lift non-CE


Container types:

2-wheel containers

- EN 840-1 120L-400L

4-wheel containers

- EN 840-2 500L-770L
- EN 840-2 1000L- 1200L
- EN 840-3 770L-1300L

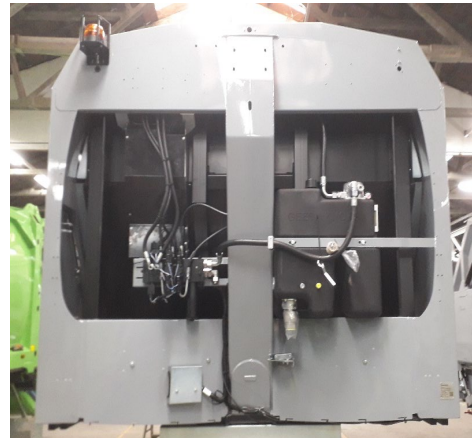

GPMIV X-Lift non-CE specs

Beacon Light LED Front Body Right	Manual Flap xx25 GCB / GEC / GHC
Beacon light LED TG LEFT	Mounting safety support body - tailgate Left side
Bin Rim Locking Extra Cylinder X-lift	Operates in Right-hand Traffic
Body mounting saddles fixed 8-points	Protection control panel Non CE
Broom & Shovel Under Body (Supports Included)	Protection rear lights high - X-lift Conventional
Close front body with 2 bars	Protection rear lights low - X-lift Conventional
Comb X-lift	Pump Support Pump position Low (When close couple pump is not possible)
Control Panel Body FRONT X-Force NON CE Unload / TG open TG close_Off Side	Q8 Oil Handel 32 - Mineral oil
Control Panel Body REAR NON CE	Software option continuous PTO signal
Control Panel X-Lift NON CE (full control) Off-side	Spillage plate 2500
Control Panel X-Lift NON CE Kerb side	Standard body floor 4 mm GPM IV / N4 L=3820 W=2540
C-profile under body, Body length L=3820	Variable pump TXV120 R (cw, 120 cc/rev)
Drip tray under Yoke pivot point	Vehicle Lighting Conv TG X-Lift
Drive Shaft Lz=750	Water Tap with ball-valve-stop in Tailgate Right
Fixed Bin catcher GCB	Worklight LED White with protection on rear beam TG LEFT
Heating element for two control panels body	Worklight LED White with protection on rear beam TG RIGHT
Heating Elements for two Control Panels tailgate	X-lift Bin Frame