


SEMI TRAILER FLATBED THREE AXLES TWIN ASSEMBLY

MECHANICAL SUSPENSION GVW : 63T PAYLOAD : 54T

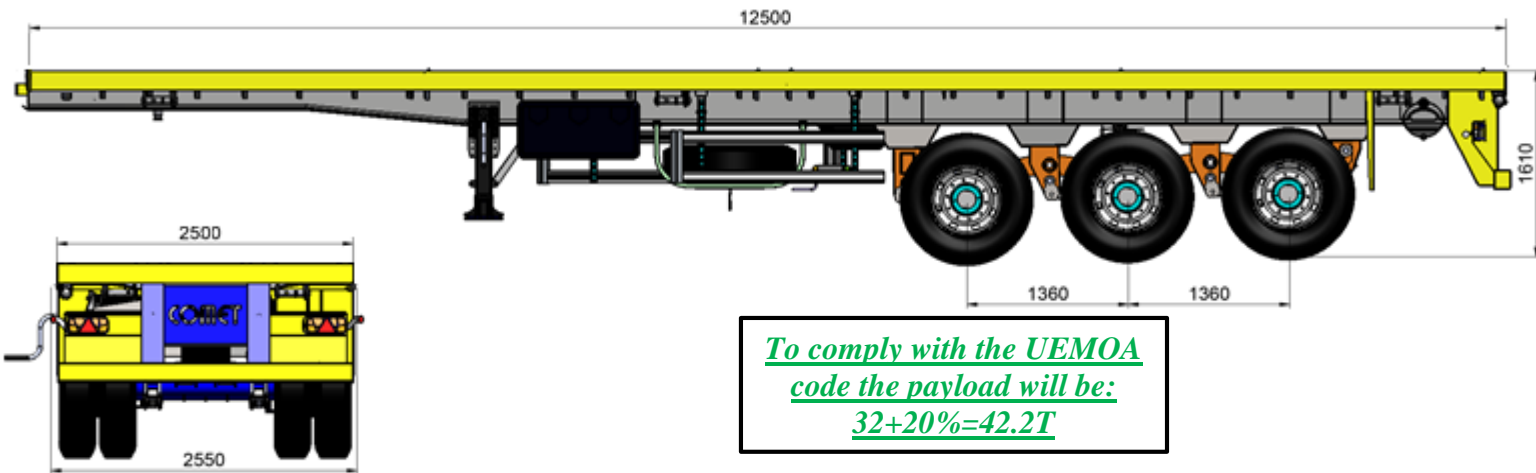

1/ FRAME :

Chassis consists of :

- ° Two beams IPE 450 with gooseneck conform to ISO 1726 to suit with all types of tractors.
- Ties sheet folded spacers rigidly consoles and the stringers.
- A plate coupling, 12 mm thick.

2/ DECK :

Deck consists of :

- ° A floor plate grooved.

3/ AXLES:

° Type **TRIDEM**

° Three axles with tubular bodies, load at ground **13T** each, disc hub for 20''.

• Mechanical drum brakes, controlled by cam S. In accordance with CE standards.

4/ RUNNIG GEAR:

° Mechanical suspension with 06 multi-leaf springs in mangano-siliceous steel. In accordance with CE standards

5/ BRAKING :

° Compressed air braking of **European** origin, **WABCO** brand, two-line with automatic corrector, in accordance with CE standards. Cam control provided by manual adjustment lever.

° Manual Park brakes with cable.

6/ LIGHTING AND SIGNALING:

- Lighting and signaling system of **European** origin, **ASPÖCK** brand.
- ° conform to the highway code and in accordance with CE standards.

7/ COUPLING :

- Mechanical landing gear **JOST** brand with two speeds:
 - Lifting capacity: 24T.
 - Static capacity: 50T.
- ° Dismantling kingpin 2'' interchangeable at 3 ½'' **JOST** brand.

8/ PNEUMATIC:

- ° Twelve (12) tubeless tires 13R22.5 or 315/80 R22.5
- ° Twin assembly, on disc wheel 9 * 22.5.
- In accordance with CE standards.

9/ EQUIPMENTS:

- ° 01 Back bumper anti-fitting.
- 01 Pare –cycle conform to the highway code.
- ° 01 double Spare wheel supports.
- 01 Spare wheel.
- ° 07 Roller clamp
- Hooks on the sides.
- 01 Toolbox **DAKEN** brand.
- 01 Water reservoir with soap maker 32 L **TAKLER** brand.
- ° 02 Rear protection wings with mud flaps.
- 12 Twist locks for 20' or 40' container.
- Wheel lever Key.
- ° Maintenance guide.

10/ PRESENTATION AND PAINTING:

- ° Full Shot blasting
- ° Application:
 - 02 high quality primary layers
 - 02 layers of high quality finishing paint, available in all colors.

11/ OPTIONS:

- ° ABS.

(*) **Weight and dimensions subject to derogation at your expense for use in certain countries.**