

Vehicle description for: TGS 22.440 4x2 BB SA



Illustration can deviate

Vehicle standards

Product family	The new MAN Truck Generation
Model & Variant	TGS 22.440 4x2 BB SA
Engine family	D26
Vehicle type	Vehicle type Semitrailer tractor (SA)
Cab	TN cab: the flexible one (narrow, long, normal height)
Main wheel distance	3900 mm
Overhang	1025 mm
Steering configuration	Left

Vertical Load

	National Registration	Technical Load
Gross weight	21,000 kg	21,000 kg
Front axle	8,000 kg	8,000 kg
Rear axle	13,000 kg	13,000 kg

Horizontal Load

	National Registration	Technical Load
Gross train weight	50,000 kg	62,000 kg

The printed images in this offer are for explanatory purposes and may differ from the actual configuration.
For further product information on the tire selection "selectively", please contact our sales staff.

Vehicle characteristics

Basic characteristics

<input type="checkbox"/> Semitrailer tractor	0P2UA
<input type="checkbox"/> Chassis class, heavy	0P2UC
<input type="checkbox"/> Destination: Algeria (DZ)	0P3FQ
<input type="checkbox"/> Merchant tonnage 22 t	0P8LG
<input type="checkbox"/> Basic layout of vehicle, all-round	0PGCU
<input type="checkbox"/> Frame type, medium-high	0P2TQ
<input type="checkbox"/> Vehicle type Semitrailer tractor (SA)	0P2UR
<input type="checkbox"/> Left-hand-drive	0P3AS
<input type="checkbox"/> Right-hand traffic	0P3F5
<input type="checkbox"/> Vehicle documentation in French	0P2LA
<input type="checkbox"/> Labelling in French	0P8NN
<input type="checkbox"/> Cab position 640 mm (distance from frame lower edge to cab floor)	0PHBE

Registration

<input type="checkbox"/> Vehicle approval, N3 class	0P3JR
<input type="checkbox"/> Maximum speed limiter, 85 km/h, electronic, engine speed regulation	0P2UI
<input type="checkbox"/> Maximum vehicle noise level not defined	0P2YN
<input type="checkbox"/> Vehicle classification in accordance with regulation (EU) 2018/858	0PKAW

Documents

<input type="checkbox"/> Confirmation of EU conformity	0P2TV
<input type="checkbox"/> Data confirmation, international	0P3AO
<input type="checkbox"/> Without registration documentation, national	0P3B0
<input type="checkbox"/> Special confirmation, heavy load / municipal operation	0P3CK
<input type="checkbox"/> Dangerous goods equipment, in accordance with ADR Type AT	0P0YR

Application scope / transport tasks

<input type="checkbox"/> Long-haul transport, special	0P6WG
<input type="checkbox"/> Increase of the tyre load capacity by 10% (for communal supplement)	0P0UU
<input type="checkbox"/> 042 SZM Heavy-duty transport	0P2QN
<input type="checkbox"/> Temperature range, vehicle deployment, operation at high temperatures	0P8KX
<input type="checkbox"/> Case hardness of final drive Distribution	0P4F0

Lines, editions and packages

<input type="checkbox"/> Special request paintwork	0PJTD
<input type="checkbox"/> Without Individual Lion package	0PJT1

Horizontal and vertical loads

<input type="checkbox"/> 21,000 kg permitted gross load, vertical, nat. appr.	0P5PK
<input type="checkbox"/> 21,000 kg permitted gross load, vertical, tech.	0P5TD
<input type="checkbox"/> 21,000 kg permitted gross load, vertical, tech. Plus	0P8GZ
<input type="checkbox"/> 8,000 kg permitted load on front axle, nat. appr.	0P5KT
<input type="checkbox"/> 8,000 kg permitted load on front axle, tech.	0P5LN
<input type="checkbox"/> 8,000 kg permitted load on front axle, tech. Plus	0P8D4
<input type="checkbox"/> 13,000 kg permitted load on rear axle NatZu	0P5HC

<input type="checkbox"/> 13,000 kg permitted load on rear axle, tech.	0P5IO
<input type="checkbox"/> 13,000 kg permitted load on rear axle, tech. Plus	0P8BY
<input type="checkbox"/> 50,000 kg permitted gross train weight, national registration	0PB19
<input type="checkbox"/> 62,000 kg permissible gross train weight TechH.	0P4YJ
<input type="checkbox"/> 86,000 kg permitted gross train weight, Tech. Plus	0PBQ8
<input type="checkbox"/> 0kN D value	0P8XD
<input type="checkbox"/> With the registered technical gross train weight, the maximum possible gradeability is 5 %	0P9A6

Notification texts

<input type="checkbox"/> Note: With increased permissible gross weight, increase in wear of driveline and reduced service life	0PFZP
<input type="checkbox"/> Notice: Reduced front overhang angle due to long radiator	0PHPG
<input type="checkbox"/> Without note (propshaft wear)	0PJRV

Chassis

Vehicle frame (wheelbase, overhang, ...)

<input type="checkbox"/> Main wheelbase, 3,900 mm	0P2ZK
<input type="checkbox"/> Frame overhang, rear, 1,025 mm	0P3CQ
<input type="checkbox"/> Main frame side member thickness, 9.5 mm	0P0Y7
<input type="checkbox"/> Vehicle rear, angled end of frame	0P0XS
<input type="checkbox"/> Semitrailer auxiliary frame	0P0XV

Exhaust system, air intake

<input type="checkbox"/> Exhaust silencer, side, left	0P1BG
<input type="checkbox"/> Exhaust tailpipe, towards rear	0P1BQ
<input type="checkbox"/> Air intake, behind cab, raised	0P0AY
<input type="checkbox"/> Pre-separator for engine air intake	0P0BA

Battery cases, batteries, alternator

<input type="checkbox"/> 2 batteries, 12 V, 180 Ah, long-life (EFB), maintenance free	0PGB1
<input type="checkbox"/> Alternator, Basic	0P1BV
<input type="checkbox"/> Medium battery box, 2 batteries	0P0WU
<input type="checkbox"/> Battery box, left	0P0WO
<input type="checkbox"/> Main battery switch, electric	0P0WE
<input type="checkbox"/> Safety cut-out	0P1V2
<input type="checkbox"/> Lockable battery box, with padlock	0P0WL

Tanks and fuel line

<input type="checkbox"/> Fuel tank capacity 590 l, right	0P4EL
<input type="checkbox"/> Fuel tank, right, aluminium	0P4GM
<input type="checkbox"/> Tank cross-section, right, medium	0P4HE
<input type="checkbox"/> Fuel tank cap, lockable for master key system	0P4H5
<input type="checkbox"/> Filter screen for fuel tank filler neck	0P1EM
<input type="checkbox"/> Fuel pre-filter position on the battery box	0PIW9

Frame attachments

<input type="checkbox"/> Underride protection, front	0P1FN
<input type="checkbox"/> Working platform, with step	0P0VE

<input type="checkbox"/> Without underride protection, side	0P1FG
<input type="checkbox"/> Spare wheel hoist on left side, in front of rear axle	0P0XO
<input type="checkbox"/> Hoist for spare wheel	0P0VN
<input type="checkbox"/> Final cross member, with hole pattern 160 x 100 mm	0P1SB
<input type="checkbox"/> Without underride protection, rear	0P1FB
<input type="checkbox"/> Wheel chock, 1 unit, with retaining device	0P1FO
<input type="checkbox"/> Without body attachment brackets/thrust plates	0P0X6

Pneumatic brakes, compressed-air generation, brake system

<input type="checkbox"/> Air compressor, 1-cylinder, 360 ccm	0P0AF
<input type="checkbox"/> Compressed-air treatment, pneumatically controlled	0P0AB
<input type="checkbox"/> Steel compressed-air tank	0P0XH
<input type="checkbox"/> Electronic brake system (EBS)	0P0BL
<input type="checkbox"/> Anti-lock braking system (ABS)	0P0BE
<input type="checkbox"/> Full brake assistant	0P0CM
<input type="checkbox"/> Without preparation for EBS Full control unit	0PHPM
<input type="checkbox"/> MAN EVBec high-performance engine brake, stages possible	0P0BW
<input type="checkbox"/> Drum brakes on front axle	0P1IA
<input type="checkbox"/> Drum brakes on rear axle	0P1I5
<input type="checkbox"/> Parking brake control, next to driver's seat	0P3KH
<input type="checkbox"/> Parking brake with spring-type actuator on rear axles (incl. leading axle/ trailing axle)	0PGBL
<input type="checkbox"/> Anti-jackknifing brake, manual, can be operated next to driver's seat	0P0CJ
<input type="checkbox"/> Brake lining thickness display, with brake lining wear warning	0P0BG
<input type="checkbox"/> Harmonisation of brake lining wear	0P0BI

Lights and acoustic signals on the chassis (rear lights, ...)

<input type="checkbox"/> Rear lights	0P2AQ
<input type="checkbox"/> Acoust. Reversing warning system when reverse gear selected	0P3CD
<input type="checkbox"/> Light function test	0P2AD
<input type="checkbox"/> Side marker lights, LED	0P2BJ

Driveline/running gear

Engine, radiator

<input type="checkbox"/> Diesel engine MAN D2676 LF04, 324 kW (440 hp) output, 2,100 Nm torque, Euro 2	0P6BP
<input type="checkbox"/> Fuel filter, for fuels up to Cleanliness Class 25	0PHII
<input type="checkbox"/> Fuel pre-filter, with oil separator/water trap	0P0AT
<input type="checkbox"/> Without torque reduction	0P0G5
<input type="checkbox"/> Engine dry-air filter, with safety insert	0P0B8
<input type="checkbox"/> Ventilation, crankcase, closed	0P8PM
<input type="checkbox"/> Engine skirt, in wheel arch, to prevent engine soiling	0P2E9
<input type="checkbox"/> Engine radiator Visco fan, high cooling output	0P0H0
<input type="checkbox"/> Fan control for start of cooling with low coolant temperature (e.g. hot country)	0P0K5
<input type="checkbox"/> Reduction of dust swirl through radiator fan	0P1YE
<input type="checkbox"/> Engine cooler, extended	0P4XY
<input type="checkbox"/> Front radiator protection, grille	0P1VP
<input type="checkbox"/> Engine oil dipstick and digital oil level gauge	0P0B6
<input type="checkbox"/> Warning message for engine coolant level, with advance warning	0P0KA


- Antifreeze, down to -32 °C 0P0AK
- Service product level indicator and intake system vacuum 0P3KT

Gearbox, clutch

- Manually operated gearbox, MAN 16.25 OD 0P5VL
- Gearbox for increased percentage of overrun during driving operation 0PGCL
- Manual gearbox operation, single-H, group/split switch 0P3KL
- Single-disc clutch, 430 mm, dry, reinforced (LongLife) 0P0DW
- Gearbox heat exchanger 0P0FW

Wheels, tyres

- Required tyre speed index J 0PFW2
- Front axle tyres Bridgestone 315/80R22.5 M-STEER 001 Steering-Road+Offroad TL 0PEYF

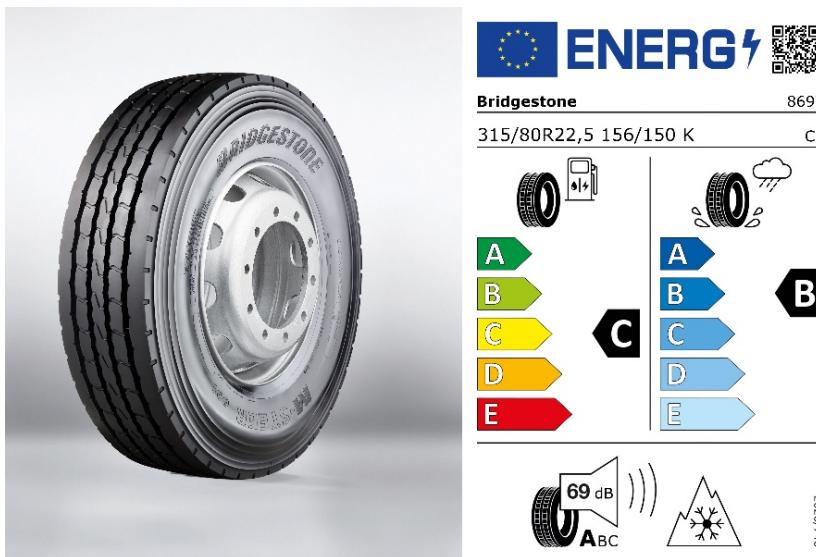

Product Information Sheet


Delegated Regulation (EU) 2020/740

Supplier name or trademark	BRIDGESTONE
Commercial name or trade designation	M-STEER 001
Tyre type identifier	8697
Tyre size designation	315/80 R22.5
Load-capacity index	156
Load-capacity index (Load index for Dual mounting)	150
Speed category symbol	K
Fuel efficiency class	C
Wet grip class	B
External rolling noise class	A
External rolling noise value	69 dB
Severe snow tire	Yes
Date of start of production	14/16
Date of end of production	-
Additional information	
Load-capacity index (Single load index for Additional Service Description)	
Load-capacity index (Dual load index for Additional Service Description)	
Speed category symbol (for Additional Service Description)	

- Rim type, front axle, steel, single-part 0P0P0
- Rim size, front axle, 10-hole, 9.00x22.5 0P0NI
- Wheel nut cover ring, front axle 0P0PR

Rear axle tyres Bridgestone 315/80R22.5 M-DRIVE 001 Drive-S+G TL

0PDT9

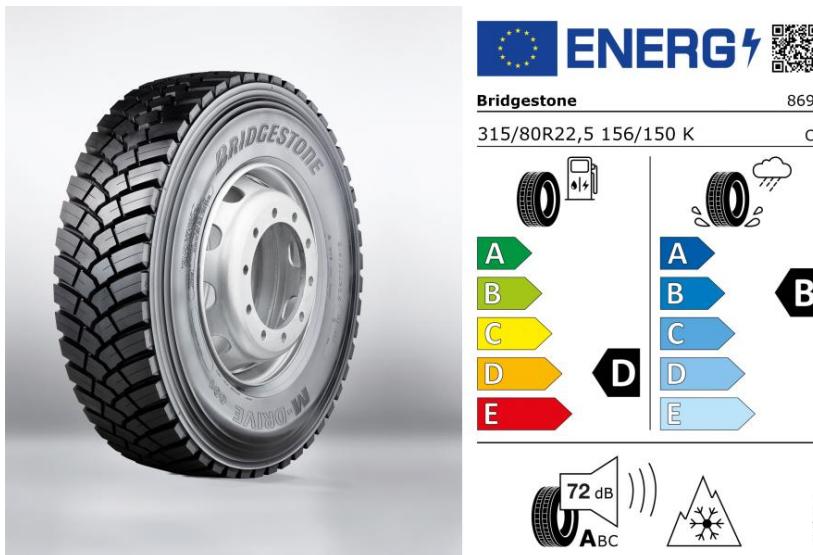

Product Information Sheet

Delegated Regulation (EU) 2020/740

Supplier name or trademark	BRIDGESTONE
Commercial name or trade designation	M-DRIVE 001
Tyre type identifier	8691
Tyre size designation	315/80 R22.5
Load capacity index	156
Load capacity index (Load index for Dual mounting)	150
Speed category symbol	K
Fuel efficiency class	D
Wet grip class	B
External rolling noise class	A
External rolling noise value	72 dB
Severe snow tyre	Yes
Date of start of production	14/16
Date of end of production	-
Additional information	
Load capacity index (Single load index for Additional Service Description)	
Load capacity index (Dual load index for Additional Service Description)	
Speed category symbol (for Additional Service Description)	

Rim type, rear axle, steel, single-part 0P0OO
 Rim size, rear axle, 10-hole, 9.00x22.5 0P0MU
 Spare wheel, in accordance with configuration for rear axle tyres 0P0MF
 Tyre inflation hose, 20 m, with pressure gauge 0P1UA
 Centring sleeves for rim mounting 0PHZW

Axes

4x2 0P3B1
 Steering ratio, standard 0P1JX
 Steering oil tank with electrical measuring sensor 0P1JV
 Front axle, 9,200 kg, not driven, straight, steered, not liftable 0P5EX
 Mudguard, front axle 0P1AT
 Rear axle HP-1352, 13,000 kg, planetary axle without drive-through, straight, not steered, not liftable 0PIY5
 Twin tyre on rear axle 0P1HN

<input type="checkbox"/> Mudguard, rear axle, upper shell removable	0P1AM
<input type="checkbox"/> Splash guard flaps on mudguard, rear axle	0P1XI
<input type="checkbox"/> Axle ratio, $i = 3.63$	0P0CZ
<input type="checkbox"/> Differential locks on driven rear axles	0P0DI
<input type="checkbox"/> Without differential locks, front axles	0P0DL
<input type="checkbox"/> Oil for driven axles, high performance, fully synthetic	0P0DO

Axle control system and suspension

<input type="checkbox"/> Suspension type for front axles and driven rear axles, leaf/leaf (BB)	0P2YB
<input type="checkbox"/> Leaf-spring suspension on front axle, parabolic, 3-leaf, steel	0P1JE
<input type="checkbox"/> Leaf-spring suspension on rear axle, parabolic, 5-leaf, steel	0P1J2
<input type="checkbox"/> Spring load-bearing capacity front axle 9,500 kg	0P5C4
<input type="checkbox"/> Spring load-bearing capacity of rear axle, 16,000 kg	0P5BW
<input type="checkbox"/> Shock absorbers on front axle	0P1M4
<input type="checkbox"/> Shock absorbers on rear axle	0P1LQ
<input type="checkbox"/> Stabiliser, front axle	0P1LD
<input type="checkbox"/> Stabiliser, rear axle	0P1LA
<input type="checkbox"/> Axle location system not as wishbone	0P6ZY
<input type="checkbox"/> Without trailer air suspension control	0PHN2

Cab

Cab and cab exterior

<input type="checkbox"/> TN cab: the flexible one (narrow, long, normal height)	0P2DF
<input type="checkbox"/> Cab mount, Comfort	0P1V9
<input type="checkbox"/> Cab tilt mechanism, manual	0P1V6
<input type="checkbox"/> Roof spoiler, 600 mm adjustment range	0P1X7
<input type="checkbox"/> Roof spoiler adjustment upon delivery, transport position	0P1XA
<input type="checkbox"/> Tilting roof, mechanical	0P1VW
<input type="checkbox"/> Bumper, steel, 3 pieces	0P1SG
<input type="checkbox"/> Front step, integrated, with grab option	0P1VE
<input type="checkbox"/> Windscreen, composite safety glass, tinted	0P1X0
<input type="checkbox"/> Sunblind, in front of windscreen	0P1WK
<input type="checkbox"/> Wiper system for windscreen	0P1WG
<input type="checkbox"/> Wiper activation, manual	0P1UL
<input type="checkbox"/> Step unit, hinged	0P1V0
<input type="checkbox"/> Central locking, with remote control	0P1WR
<input type="checkbox"/> Vehicle key, 4 units	0P3JU
<input type="checkbox"/> No door extension	0P1WV
<input type="checkbox"/> Door labelling, according to maximum technically permitted overall vehicle weight	0P2DO
<input type="checkbox"/> Door windows, tinted	0P1WO
<input type="checkbox"/> Door window, safety glass	0P1WM
<input type="checkbox"/> Cab rear wall, no window	0P1VD

Lights and acoustic signals on cab exterior (headlights, horn, ...)

<input type="checkbox"/> Without light and headlight package	0PKWU
<input type="checkbox"/> Front headlights, H7	0P1ZN
<input type="checkbox"/> Stone protection guard for front headlights, wide and fine mesh	0PICD

<input type="checkbox"/> Daytime driving lights with rear lights, LED	0P2BQ
<input type="checkbox"/> Fog lights, H7	0P2AH
<input type="checkbox"/> Cornering light, H7	0P1YF
<input type="checkbox"/> Turn signal lights, sides, bulb	0P1Z6
<input type="checkbox"/> Headlight beam regulator, manual	0P2AC
<input type="checkbox"/> Driving-light control, manual	0P1ZF
<input type="checkbox"/> Contour lights, LED, 2 units	0P2BS
<input type="checkbox"/> Comfort indicator function, can be activated	0P1ZW
<input type="checkbox"/> Compressed-air horn, 2 units, cab roof	0P1UW
<input type="checkbox"/> Revolving beacons, LED, yellow (individual LEDs light up in cascades, revolving)	0P2BD
<input type="checkbox"/> 2 revolving beacons on cab roof, 1 right and 1 left	0P2B3
<input type="checkbox"/> Spotlight, 1 unit, cab roof, left	0P1YK
<input type="checkbox"/> Spotlight, rear of cab, lower, outside	0P1Z2
<input type="checkbox"/> Spotlight, LED, white	0PJQA
<input type="checkbox"/> Spotlight deactivation, speed-dependent, from 20 km/h	0PKF0
<input type="checkbox"/> Preparation for lighting behind cab	0PHZU
<input type="checkbox"/> Without revolving beacons at the rear of the vehicle	0PJRO

Mirrors and mirror replacements

<input type="checkbox"/> Without mirror package	0PKWV
<input type="checkbox"/> Exterior rear-view mirror, electrically adjustable	0P2CA
<input type="checkbox"/> Kerb mirror, right, electrically adjustable	0P2CG
<input type="checkbox"/> Front mirror, mechanical adjustment	0P2CJ
<input type="checkbox"/> Mirror housing, not painted	0P2CP
<input type="checkbox"/> Vehicle components, suitable for body width larger than 2,400 mm to 2,600 mm	0P2CT

Seats

<input type="checkbox"/> Seat covers, fabric, standard	0P2PQ
<input type="checkbox"/> Without driver's seat package	0PKXV
<input type="checkbox"/> Comfort driver's seat, air-sprung	0P2P2
<input type="checkbox"/> Driver's seat arm rests	0P2OE
<input type="checkbox"/> Adjustment of seat belt height, driver's seat	0P4XQ
<input type="checkbox"/> Without co-driver's seat package	0PKXU
<input type="checkbox"/> Co-driver's seat, not sprung, length, height and backrest adjustment	0P2OP
<input type="checkbox"/> Co-driver's seat arm rests	0P2OC
<input type="checkbox"/> Seat belt indicator, driver's side, acoustic and visual	0P2NB

Driver's workplace

<input type="checkbox"/> Multi-function steering wheel, adjustable height and angle	0P2GD
<input type="checkbox"/> Steering wheel, with parking position	0P2GE
<input type="checkbox"/> Steering lock	0P3JZ
<input type="checkbox"/> Instrumentation, Basic km/h	0P3L3
<input type="checkbox"/> Tachograph Simulation Unit (TSU), instead of tachograph	0P2KY
<input type="checkbox"/> Tachograph, calibrated	0P2KG
<input type="checkbox"/> Socket, cab centre, 2 units, 12 V and 24 V	0P2HX
<input type="checkbox"/> Stowage compartment, open with two USB sockets, 5 V, charging only, to the right of climate control panel	0PGT7
<input type="checkbox"/> 2 pull-out cup holders in instrument panel	0P2FA
<input type="checkbox"/> Comfort shelf below Infotainment display	0PFY0

<input type="checkbox"/>	Removable ashtrays, instrument panel middle section, two units, large	0P8KZ
<input type="checkbox"/>	Cigarette lighter	0P2IH
<input type="checkbox"/>	Standard control field, inside of driver's door, with door open operated externally, 4 function buttons	0P3KE
<input type="checkbox"/>	Single DIN slots, 4 units, roof space, front	0P2FJ
<input type="checkbox"/>	Without storage tray next to seat	0PJRS

Cab air-conditioning system

<input type="checkbox"/>	Air-conditioning system, manual	0P2NU
<input type="checkbox"/>	Pre-separator (cyclone filter) for interior air intake	0P2O7

Bunk area

<input type="checkbox"/>	1 bunk, 90 mm mattress, with stowage facilities, sockets	0PKMW
<input type="checkbox"/>	Bunk, bottom, with slatted support	0P2GX
<input type="checkbox"/>	Fabric cover for bottom bunk	0P2I5
<input type="checkbox"/>	Standard bed mattress, bottom, 90 mm	0P2GM
<input type="checkbox"/>	Tray, left, at bottom bunk	0P2EH
<input type="checkbox"/>	Tray, right, at bottom bunk	0P2EN
<input type="checkbox"/>	Reading light on swan neck, cab rear area, bottom, centre, 1 unit	0P2IV
<input type="checkbox"/>	Cross-cab curtain, rear seats	0P2GP
<input type="checkbox"/>	Storage box, rear, left, accessible from outside with flap and from inside with suspended tray	0P2H1
<input type="checkbox"/>	Storage box, rear, right, accessible from outside with flap and from inside with suspended tray	0P2H5

Cab interior

<input type="checkbox"/>	Colour scheme for interior styling, dark	0P2I6
<input type="checkbox"/>	Interior styling analogous to colour scheme	0PGBT
<input type="checkbox"/>	Without driver's workplace package, Comfort	0PKXT
<input type="checkbox"/>	Windscreen roller blind, internal	0P2FE
<input type="checkbox"/>	Interior light, reading light (both sides)	0PKMZ
<input type="checkbox"/>	Interior light, central	0PHA6
<input type="checkbox"/>	Reading light, 2 units, 1 on driver's side and 1 on co-driver's side	0P2IR
<input type="checkbox"/>	Entry lighting	0P2IO
<input type="checkbox"/>	Entry handles, standard	0PHPK
<input type="checkbox"/>	All-round curtain	0P2GS
<input type="checkbox"/>	Door interior cladding, washable	0P2IA
<input type="checkbox"/>	Without stowage and storage space package	0PKXS
<input type="checkbox"/>	Stowage compartment, 1 unit, cab rear wall, at bottom bunk, with control panel	0P2EW
<input type="checkbox"/>	Drawer, 1 unit, instrument panel in middle section	0P2HJ
<input type="checkbox"/>	Drawer, 1 unit and folding module, 1 unit, centre area, to rear	0P2H7
<input type="checkbox"/>	Socket, cab bottom bunk area, 2 units, 12 V and 24 V, and USB socket, 5 V, for charging only	0P2HZ
<input type="checkbox"/>	Grab handle, above door, internal, 2 units, 1 right and 1 left	0P2G2

Accessories and tools

<input type="checkbox"/>	Without accessories and tools package	0PKXA
<input type="checkbox"/>	Vehicle toolkit	0P2TX
<input type="checkbox"/>	First aid kit	0P3F3
<input type="checkbox"/>	Warning triangle, 1 units	0P3FI
<input type="checkbox"/>	Compressed-air connection, cab	0P2FL

Jack, 25,000 kg 0P3F9

Intelligent Truck

Assistance systems

<input type="checkbox"/> Electronic Stability Program (ESP)	0P1TN
<input type="checkbox"/> Anti-slip control (ASR)	0P1T2
<input type="checkbox"/> Tempomat (cruise control, CC)	0P1TR
<input type="checkbox"/> Road speed limiter, adjustable, limiter (engine speed regulation)	0P0C3
<input type="checkbox"/> Without advanced emergency braking system	0P1U5
<input type="checkbox"/> Idle shut down	0P0GX
<input type="checkbox"/> Without driving fitness detection system	0PHN5
<input type="checkbox"/> Without Front Detection	0PHNA
<input type="checkbox"/> Without traffic sign recognition	0PHNE
<input type="checkbox"/> Without Reversing Motion System	0PHNV
<input type="checkbox"/> Without distance warning system	0PKA0

Infotainment (radio,...)

<input type="checkbox"/> MMT infotainment system, Starter High	0P2M2
<input type="checkbox"/> MAN sound system	0P2MG
<input type="checkbox"/> No navigation map	0P2N2
<input type="checkbox"/> English additionally for display	0P2JQ

Bodies/interfaces

Interfaces to semitrailer (e.g. fifth-wheel coupling, brake connection,...)

<input type="checkbox"/> 2-line semitrailer brake connection, behind cab, spiral cable with standard coupling	0P1O2
<input type="checkbox"/> Trailer socket behind cab, 24 V, 15-pin	0P1P9
<input type="checkbox"/> Spiral cable to semitrailer, electr., one unit, for trailer socket behind cab, 24-V, 15-pin to 15-pin	0P8NY
<input type="checkbox"/> Y-spiral line to semitrailer, electr., for trailer sockets behind cab, 24 V, 15 pin to 7+7 pin	0P1QO
<input type="checkbox"/> Spiral cable to semitrailer, electric, for trailer socket ABS, behind cab	0P8O1
<input type="checkbox"/> Fifth-wheel pick-up plate installation height, 40 mm (up to max. 20,000 kg fifth-wheel coupling load)	0P1Q3
<input type="checkbox"/> JOST JSK 37 C 2" fifth-wheel coupling	0P1RM
<input type="checkbox"/> Kingpin, 2" diameter	0P1RY
<input type="checkbox"/> Manufacturer of fifth-wheel coupling: Jost	0PBY1
<input type="checkbox"/> Fifth-wheel coupling installation height, 185 mm	0P1PS
<input type="checkbox"/> Fifth-wheel coupling, automatic lubrication	0P1Q7
<input type="checkbox"/> Rubber joint bearing, fifth-wheel coupling	0PBY6
<input type="checkbox"/> Fifth-wheel coupling actuation, normal handle	0P1QI
<input type="checkbox"/> Without sensing of the fifth-wheel coupling	0PHN7
<input type="checkbox"/> Fifth-wheel lead, 585 mm	0P5BF

Interfaces to trailer (e.g. trailer coupling, brake connections,...)

<input type="checkbox"/> Towing coupling at final cross member, ROCKINGER SK5	0P1MZ
<input type="checkbox"/> Towing coupling on final cross member	0P1SH
<input type="checkbox"/> Without trailer brake connection at end of frame, centre	0P1O0
<input type="checkbox"/> Without trailer socket at frame end	0P1OW

Trailer socket for anti-lock braking system (ABS), behind cab 0P1O5

Ex works bodies and interfaces to bodies (e.g. tipper indicator...)

Interface for data exch. with body (customer-specific control module) and engine intermediate speed control (ZDR), front area of cab 0P2NA

Interface for vehicle data (FMS) 0P2J3

PTOs

PTO, gearbox-dependent, type NH/4c, without flange, $f=1.17/1.40$, position approx. 3 o'clock 0P4QI

PTO, gearbox-dependent, for short-time operation less than 60 min 0P4VK

PTO, gearbox-dependent, shiftable 0P4X9

Without fan wheel for PTO, gearbox-dependent 0P4VR

Function parameters for PTO; gearbox-dependent, driving operation 0P4WP

Sector-specific parameterisation, general 0P4X0

Towing, recovery and lashing

Central coupling jaw, integrated in bumper/front cross member, with lock pin 0P1MK

Paintworks

Paintwork, cab, top

Top coating, cab 0P6YB

Top coating, roof spoiler 0P6X3

Paintwork, cab, bottom

Textured coating, step units 0P6X9

Textured coating, mudguard, behind cab 0P6YG

Textured coating, bumper, steel 0P6YQ

Paintwork, chassis

Without additional top coating on chassis 0PJTK

Top coating, rims, steel, white-aluminium 0P6YL

Colour

<input type="checkbox"/> Top coating, cab	PURE WHITE RAL 9010	N
<input type="checkbox"/> Top coating, roof spoiler	PURE WHITE RAL 9010	N

Technical data: TGS 22.440 4x2 BB SA / L03JAA02

Vehicle type: Vehicle type Semitrailer tractor (SA)

Cab: TN cab: the flexible one (narrow, long, normal height)

Drive Type: 4x2

Lengths mm

TD071	Total length	6642.0
TD063	Front vehicle overhang	1607.0
TD057	Wheelbase between front axles	0
TD058	Wheelbase between leading axle and rear axle	0
TD059	Wheelbase between rear axles	0
TD060	Wheelbase between rear axle and trailing axle	0
TD064	Rear frame overhang	1000.0
TD072	Distance from first front axle to body	865.0
TD067	Distance to kingpin from front axle, nominal position	3325.0
TD074	Slew radius, front	2360.0
TD075	Slew radius, rear	1768.0
TD068	Coupling length	6474.0

Widths mm

TD008	Width included rearview mirror	2981.0
TD001	Width over cab	2240.0

Frame mm

TD009	Frame width at front	945.0
TD010	Frame width at the rear	765.0
TD078	Frame profile	270 x 85 x 9,5

Heights mm

TD033	Maximum external height, unladen	3847.0
TD082	Total transport height, unladen	3311.0
TD034	Maximum external height, laden	3749.0
TD035	Frame height at theoretical rear wheelbase, unladen	1227.0
TD036	Frame height at theoretical rear wheelbase, laden	1076.0
TD045	Raising from driving position, front	0.0
TD046	Lowering from driving position, front	0.0
TD047	Raising from driving position, rear	0.0
TD048	Lowering from driving position, rear	0.0
TD051	Height of fifth-wheel coupling above ground, unladen	1455.0
TD052	Height of fifth-wheel coupling above ground, laden	1304.0

Circle dimensions m

TD055	Track circle diameter	13.7
TD056	Wall-to-wall turning circle diameter	15.6

Weights/loads kg

TD026	Chassis weight with cab	7872
TD027	Chassis weight, front	5335
TD028	Chassis weight, rear	2537
TD029	Payload	13128

The technical data must be considered as an approximation. Some of the values are given in a simplified form. More detailed notes and descriptions can be found in the respective information in the overview. Contents and specifications have been compiled with the greatest possible care. Nevertheless, we do not assume responsibility for the data and values supplied being correct and up to date. Subject to errors and changes. MAN Truck & Bus AG is liable only in cases of intent, gross negligence or culpable breach of significant contractual obligations.